



## DC 10000 dilution cascade with electrical operating pump

### Description

The DC 10000 consists of four cascaded special dilution systems with the dilution factor 1:10. The DC 10000 dilution cascade has one aerosol inlet and four aerosol outlets. Depending on which aerosol outlet is connected to the measuring device, the aerosol with the dilution factors 1:10, 1:100, 1:1,000 or 1:10,000 are diluted and measured.

The DC 10000 can be operated with all common optical particle counters (OPC) according to ISO 12501-4 or optical aerosol spectrometers (OAS) according to ISO 12501-1. The DC 10000 can be used up to a particle size of approx.  $5\ \mu\text{m}$ .

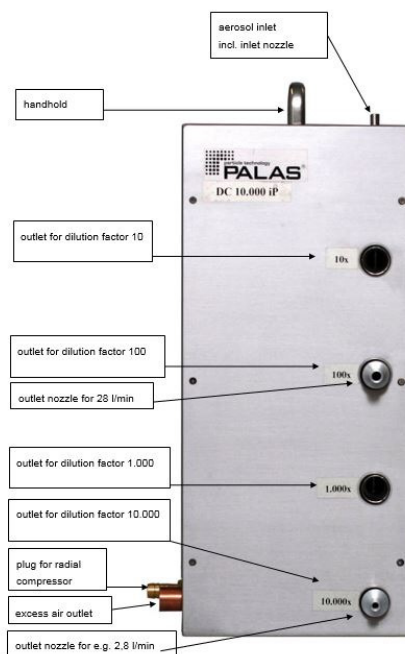


Fig. 1: Overview of the DC 10000, front view

### Functional principle

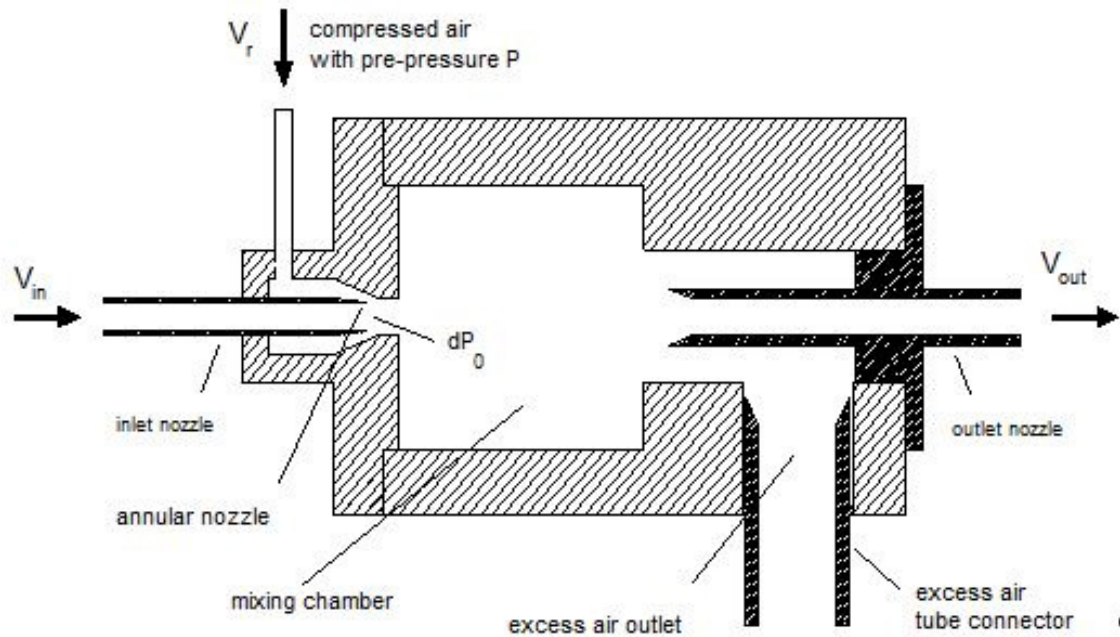


Fig. 2: Functional principle

Particle-free air with the volume flow  $V_R$  circulates through an annular passage around the suction nozzle. Thus, according to Bernoulli, a volume flow  $V_{An}$  is generated in the suction nozzle.

The dilution factor  $V_F$  is calculated according to the formula:

$$V_F = \frac{(\dot{V}_R + \dot{V}_{An})}{\dot{V}_{An}}$$

Fig. 3: Formula for the dilution factor  $V_F$ .

The DC 10000 needs no compressed air connection. So only an electrical power supply is necessary for operation.

Type	Dilution factor* $V_F$	Pressure - resistant up to 10 bar	Chemically resistant	Heatable up ... °C	$dp_{max}$ in $\mu m$	Compressed air 4 – 8 bar	Cascadable	Voltage
DC 100	10, 100				< 5			115 V / 230 V
DC 1000	10, 100, 1000				< 5			115 V / 230 V
DC 10000	10, 100, 1000, 10000				< 5			115V / 230 V
KHG 10	10		x	150	< 20	x	x	115 V / 230 V
KHG 10 D	10	x	x	150	< 20	x	x	115 V / 230 V
PMPD 100	100		x	200	< 5	x		115 V / 230 V
PMPD 1000	1000		x	200	< 5	x		115 V / 230 V
VDD 10	1 – 10				< 10	x		115 V / 230 V
VKL 10	10				< 20	x	x	
VKL 10 E	10		x		< 20	x	x	
VKL 10 ED	10	x	x		< 20	x	x	
VKL 10 V	10				< 20	x	x	
VKL 27	27				< 10	x	x	
VKL 100	100				< 2	x	x	

\*Other dilution factors on request

Table 1: Technical characteristics of Palas® dilution systems

## Benefits

- No compressed air connection; only electrical power supply 115 - 230 V, 50 - 60 Hz
- Dilution factors 1:10, 1:100, 1:1,000, 1:10,000
- The user can perform a simple functional test on-site
- The dilution systems can be combined with all common particle counters
- The dilution systems from Palas® are characterized unambiguously. This is documented with a calibration certificate for each individual device.

## Datasheet

Parameter	Description
<b>Power supply</b>	115 – 230 V, 50 – 60 Hz
<b>Dimensions</b>	approx. 500 • 230 • 150 mm (H • W • D)
<b>Weight</b>	approx. 10 kg
<b>Dilution factor</b>	1 : 10 1 : 100 1 : 1,000 1 : 10,000
<b>Isokinetic suction nozzles</b>	2 – 5 l/min, 15 – 37 l/min
<b>Maximum particle size</b>	< 5 $\mu$ m
<b>Volume flow (clean air)</b>	72 – 180 l/min
<b>Volume flow (suction flow)</b>	2 – 5 l/min

## Applications

- Aerosol dilutions in filter media test systems, e.g. MFP 1000 HEPA and MFP Nano plus according to EN 1822 and ISO 29463
- Aerosol dilutions in filter test systems, e.g. according to EN 779, ASHRAE 52.2 and ISO 16890
- Aerosol dilution in clean rooms
- Aerosol dilution in the operating room to determine the level of protection according to SWKI VA 105-1 and DIN 1946-4
- Recovery tests according to ISO 14644-3

**Palas GmbH**  
Partikel- und Lasermesstechnik  
Greschbachstrasse 3 b  
**76229 Karlsruhe**  
Germany

**Managing Partner:**  
Dr.-Ing. Maximilian Weiß, Udo Fuchslocher  
**Commercial Register:**  
register court: Mannheim  
company registration number: HRB 103813  
USt-Id: DE143585902



**Contact:** E-Mail: [mail@palas.de](mailto:mail@palas.de) Internet: [www.palas.de](http://www.palas.de) Tel: +49 (0)721 96213-0 Fax: +49 (0)721 96213-33